


ONE TOUCH PROGRAMMABLE

Portable Battery Chargers

Select-a-Charge

It's **ALL** Right Here

Easier than setting a clock. No need to open case, download software, or wade through manuals. Change profiles to charge every battery type in seconds. Also controls gassing cycle and recycle times.

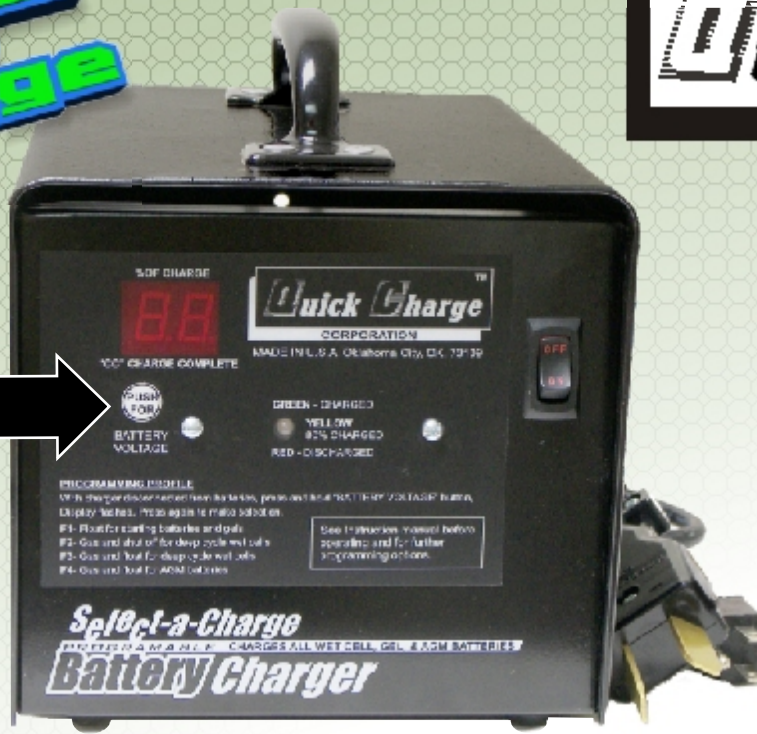

Charge

Gel, AGM, Starting, and Wet Deep Cycle batteries **With Precision**

DIGITALLY DISPLAYS % OF CHARGE AND BATTERY VOLTAGE

TRI COLOR LED MONITORS BATTERY PROGRESS

REAL AMBIENT TEMPERATURE COMPENSATED FLOAT VOLTAGE

CURRENT LIMITED AND REVERSE POLARITY PROTECTED

MODEL	DC VOLTS	DC AMPS	AC POWER	Dimensions H.W.D in.	WEIGHT	BATTERY CAPACITY @ 20 Hr. rate
SCP1210	12	10	117v 60hz. 1.5 amp	6.5 x 7 x 8	12	80-150 Amp Hour
SCP1225	12	25	117v 60hz. 3 amp	6.5 x 7 x 8	18	150-350 Amp Hour
SCP1240	12	40	117v 60hz. 6 amp	8.5 x 10 x 9.5	32	350-550 Amp Hour
SCP2410	24	10	117v 60hz. 3 amp	6.5 x 7 x 8	18	80-150 Amp Hour
SCP2425	24	25	117v 60hz. 6 amp	8.5 x 10 x 9.5	32	150-350 Amp Hour
SCP2440	24	40	117v 60hz. 11 amp	8.5 x 10 x 9.5	38	350-550 Amp Hour
SCP3225	32	25	117v 60hz. 10 amp	8.5 x 10 x 9.5	34	150-350 Amp Hour
SCP3612	36	12	117v 60hz. 4 amp	6.5 x 7 x 8	20	80-150 Amp Hour
SCP3625	36	25	117v 60hz. 10 amp	8.5 x 10 x 9.5	34	150-350 Amp Hour
SCP3640	36	40	117v 60hz. 15 amp	8.5 x 10 x 11	50	350-550 Amp Hour
SCP4815	48	15	117v 60hz. 8 amp	8.5 x 10 x 9.5	32	100-250 Amp Hour
SCP4825	48	25	117v 60hz. 13 amp	8.5 x 10 x 9.5	36	150-350 Amp Hour
SCP4840	48	40	117v 60hz. 18 amp	8.5 x 10 x 11	52	350-550 Amp Hour
SCP7220	72	20	117v 60hz. 15 amp	8.5 x 10 x 11	40	150-350 Amp Hour

All models available in 230v 50 Hz. Models SCPXU

25% more ENERGY EFFICIENT Than Ferroresonant chargers



All DC plugs available

Safe:

No Power in the charge leads until connected to the batteries means no arcing at the charge leads even when shorted together

Current limited to protect against DC overloads.

Quality:

100% copper transformer heavy duty rectifiers, and a three year warranty.